


# Instructions



## Gateway™ Tools

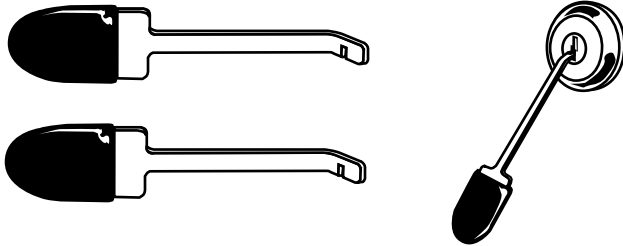

No. GTO

### GATEWAY DUST COVER WEDGE

These tools have been designed to keep the dust cover out of the way, so that broken keys, picks, etc., can be extracted with little difficulty.

Merely insert the Gateway with the handle in the nine o'clock position (notched end facing downward), and rotate the handle counterclockwise to the six o'clock position. The side of the tool which is opposite the notch will wedge the dust cover open. Each tool is designed to hold the dust cover firmly in place, while at the same time preventing any damage to the lock cap, dust cover, or spring.

If the situation warrants, you may also use the Gateway on the top side of the lock (twelve o'clock position) and it will still remain firmly in place during the extraction process.

Note: The variation between the depths of the notches on GTO-1 and GTO-2 is barely visible (.010"), but quite necessary. The gain or loss of only a few thousandths could mean the difference between a loose fit or a broken tool.

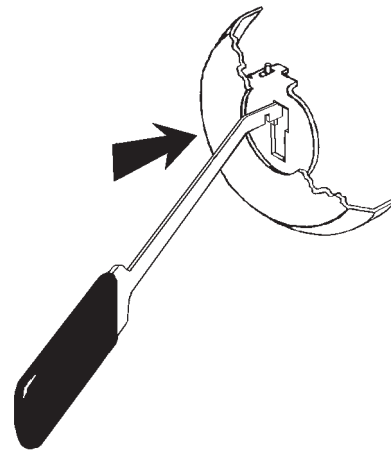


Fig. 1

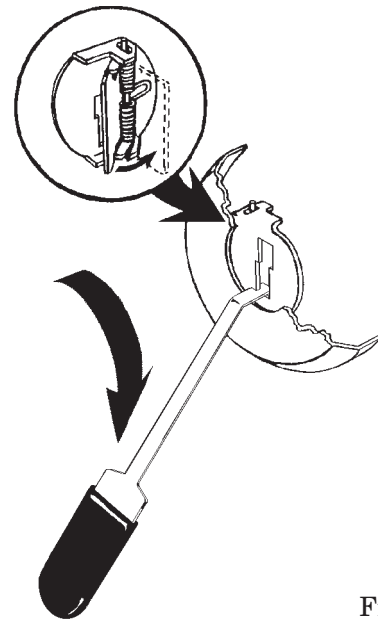


Fig. 2