


# Instructions



## Door Puller for Safe Deposit Boxes

No. DP-7B

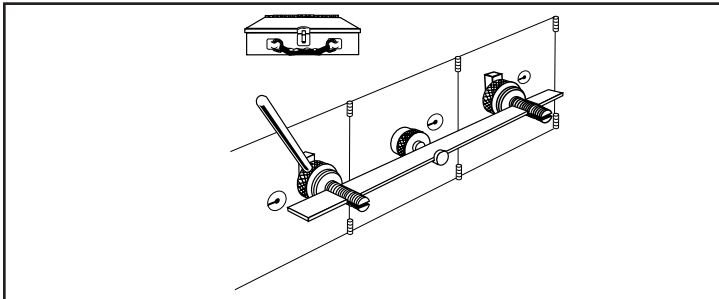

After the lock core has been pulled and use of the guard key has not opened the door, then it is time to apply the Door Puller set.

1. Place the stepped spacer block onto the hook unit. See Fig. 1. The three different diametered steps make it adaptable to three different sizes of plug bores.
2. Place the correct diameter step into the corresponding bore. Have the hook end set against the inside back wall of the door. See Fig. 2.
3. Tighten the knurled nut to hold hook in place. The flat surface on the outside of the hook unit should be in a level position. See Fig. 3.
4. The long, flat blade is then fitted onto the holding slot, along with the remainder of the puller unit, as shown in Fig. 4.
5. Position feet of Puller Unit onto "Rebates" (partitions between boxes) or away from centers of adjacent doors, so as to minimize the possibility of distortion. The knurled nut is then turned until the door is pulled out.

*Door Puller Set No. DP-7B includes Nose Puller Set No. NP-4B- all with in a carrying case.*

### Replacement Parts for the DP-7B Door Puller:

- No. DP-7B-1: Hooked Anchoring Post
- No. DP-7B-2: Knurled Nut only, to fit Anchor Post and Leg
- No. DP-7B-3: 3 Diameter Spacer Block
- No. DP-7B-4: Flat Blade
- No. DP-7B-5: Slotted Leg with Foot
- No. DP-7B-6: Handle
- No. NP-4B-4: Ball Thrust Bearing
- No. NP-4B-5: Knurled Knob for Thrust Bearing

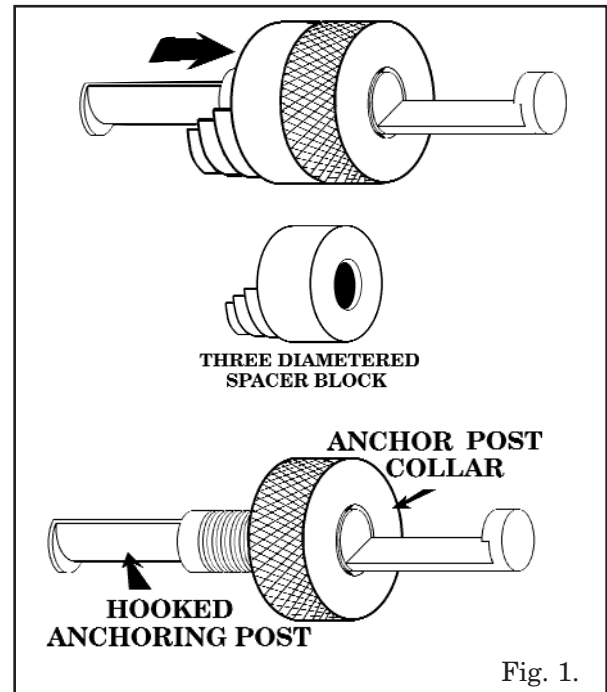


Fig. 1.

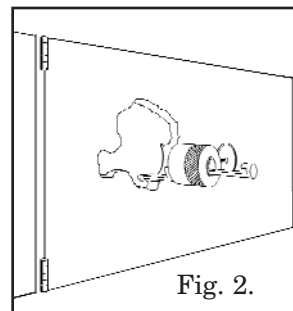


Fig. 2.

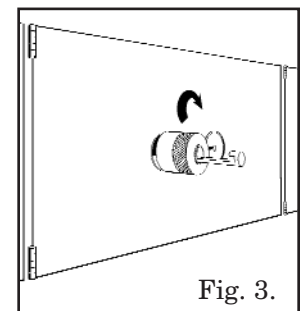


Fig. 3.

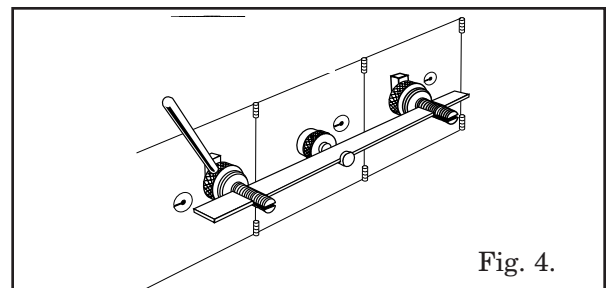


Fig. 4.

032300 35T00-090-00